

## 3 The Parker Service Master *Easy*

### The Parker Service Master *Easy*

- 3-channel and 4-channel versions
- Easy operation due to automatic sensor recognition
- PC connection
- Calculation channels
- Integrated memory
- Trigger saving
- Incl. PC software SensoWin®




**The Parker Service Master *Easy*** is a multi-channel handheld measuring device for the simultaneous measuring of important hydraulic values.

All hydraulic parameters such as pressure, differential pressure, flow and hydraulic power can be measured, displayed, saved and processed.

To meet the requirements of both modern industrial hydraulics and complex mobile hydraulics, we offer a range of different models.

# 3 The Parker Service Master *Easy*

## Function specifications

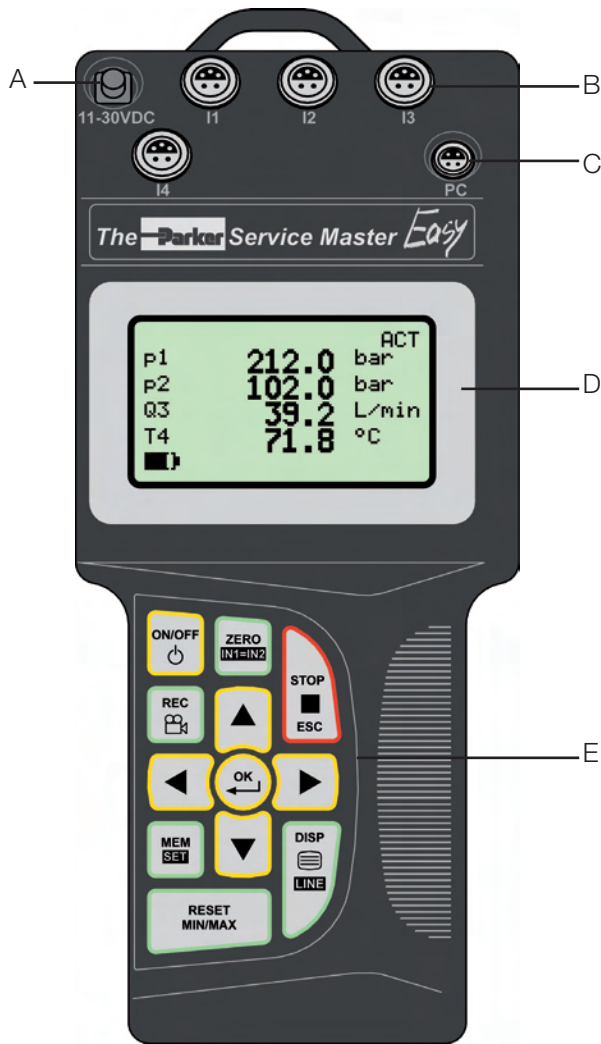

A	11-30 VDC port for power supply 110/230 VAC-15 VDC or car cable adapter 12/24 VDC
B	I1 – I4 sensor connections
C	PC (USB) port
D	Display
E	Keypad
	ON/OFF
	Confirmation of function/value
	Selection of function/value
	Stop/Escape
<b>Menu keys</b>	
	<ul style="list-style-type: none"> <li>Zero-point correction</li> <li>Differential value alignment</li> </ul>
	<ul style="list-style-type: none"> <li>Memory configuration</li> <li>Main menu (device settings)</li> </ul>
	<ul style="list-style-type: none"> <li>MIN, MAX/ACT or FS display</li> <li>Display configuration</li> </ul>
	Measured value recording
	Reset MIN and MAX values

# 3 The Parker Service Master Easy

## Technical data

<b>The Parker Service Master Easy</b>	
<b>Input</b>	3 or 4 Parker analogue inputs with sensor recognition
Plug connection	5 pin, push-pull
<b>Accuracy</b>	
Accuracy	$\pm 0.2 \% \text{ FS} \pm 1 \text{ digit}$
Scanning rate	1 ms 0.25 ms FAST MODE (IN1)
Interface	USB 2.0, compatible with USB 1.1 Min. 5 ms online data transmission ACT, MIN, MAX
<b>Memory</b>	
Measured value storage	1,000,000 points
Curve memory	240,000 points
Data format	ACT MIN/MAX FAST (0.25 ms) IN1
Memory configuration	Interval (e.g. 5 ms) Points/channel (2,000)
<b>Display</b>	
LCD resolution	128 x 64 pixels with back-lit illumination
Visible area	72 x 40 mm
Digit size	6 mm (with 4-line display)
Functions	Difference, addition, hydraulic power, volume, ACT, MIN, MAX, FS, TEMP display, battery level
<b>Power supply (external)</b>	
Power supply	11 ... 30 VDC
Power supply	110/240 VAC-15 VDC
Car cable adapter	12/24 VDC
<b>Rechargeable battery</b>	
Type	NiMH
Operating time	with 3 sensors approx. 8 h
<b>Housing</b>	
	Polyamide, 235 x 106 x 53 mm, weight: 530 g
<b>Ambient conditions</b>	
Ambient temperature	0 ... 50 °C
Storage temperature	-25 °C ... 60 °C
Temperature error	0.02 % / °C
Rel. humidity	< 80 %
Type of protection	IP 54 EN 60529
Drop test	IEC 60
<b>PC software SensoWin®</b>	
	Read-out, display, computer analysis of measured data, read-out, alteration of device settings, loading of device settings from library onto handheld device

# 3 The Parker Service Master *Easy*

## Supply range and accessories

The Parker Service Master <i>Easy</i> with power supply unit SCSN/PC software Sen-soWin®/PC cable		Order code
The Parker Service Master <i>Easy</i>	3-channel	SCM-330-2-02
The Parker Service Master <i>Easy</i>	4-channel	SCM-340-2-02

Spare parts/accessories		Order code
Power supply	110/230 VAC EUR/UK/US	SCSN-450
Car cable adapter	12/24 VDC	SCK-318-05-21
PC connection cable	USB	SCK-315-02-34
Spare rechargeable battery		SC-BAT-340
Equipment case		SCC-DRV-300

The Parker Service Master <i>Easy</i> kits	Order code		
	SCKIT-330-00	SCKIT-340-00	SCKIT-340-PTQ
Equipment case SCC-DRV-300	1	1	1
The Parker Service Master <i>Easy</i>	SCM-330-2-02	SCM-340-2-02	SCM-340-2-02
Pressure/temperature sensor 0...600 bar SCPT-600-02-02	—	—	2
Temperature sensor SCT-190-00-02	—	—	1
Turbine flow meter SCFT-150-DRV	—	—	1
3-m connection cable SCK-102-03-02	3	2	2
5-m connection cable SCK-102-05-02	—	2	2
Adapter (M16x2 male - M16x2 male) SCA-EMA-3/3	2	2	2
Test hose 1,500 mm (M16x2) SMA3-1500	2	2	2
Please order further accessories/sensors separately			

The Parker Service Master <i>Easy</i> with calibration certificate as per ISO 9001		Order code
The Parker Service Master <i>Easy</i>	3-channel	K-SCM-330-2-02
The Parker Service Master <i>Easy</i>	4-channel	K-SCM-340-2-02
The Parker Service Master <i>Easy</i> kit		K-SCKIT-330-00
The Parker Service Master <i>Easy</i> kit		K-SCKIT-340-00
The Parker Service Master <i>Easy</i> p-Q kit		K-SCKIT-340-PTQ