## 14 Tachometer SCRPM analogue

#### Tachometer SCRPM analogue


- Also for contactless measurement of rotational speed
- Measures up to 10,000 RPM
- With 3-meter fixed cable




Rotational-speed-dependent data, such as flowrate from variable pumps, are determined ideally in combination with the pressure and volume flow measurement of a hydraulic drive.

Contactless speed measurement (opto-electronic principle) can be done quickly and easily.


The rotational speed is measured e.g. on a drive shaft and displayed on the handheld device. Installation or adjustment are not necessary.



Rotating shaft non-contact measurement of rotational speed.



Contact measurement of rotational speed with contact adapter.



Front-face measurement of rotational speed with contact adapter.


For accurate recording of the opto-electronic signal, please use the reflecting strips supplied.

On a shaft or drive unit, the rotational speed is measured directly with the contact adapter.



## 14 Tachometer SCRPM analogue

### **Function specifications**

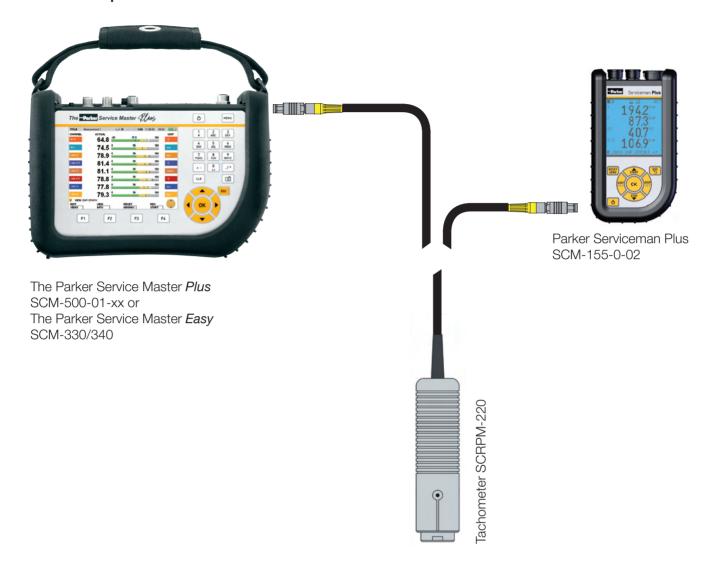






# 14 Tachometer SCRPM analogue

#### Technical data

Input		
Measuring distance	25500 mm	
Measuring angle	± 45°	
Type of measuring	optical, red LED	
Output		
Measuring range	2010.000 RPM	
Accuracy	< 0.5 % FS*	
Resolution	± 5 RPM	
Electrical connection to hand-held measuring device		
Fixed cable 3 m**	5 pin push-pull	
General		
Material	ABS	
Dimensions	Ø 34 mm/L = 130 mm	
Weight	230 g	
Ambient temperature	070 °C	
* FS = Full scale (measuring range end value)  ** Cable extension is not permitted		

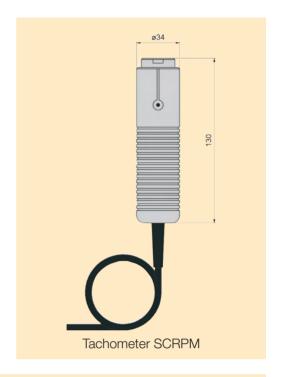

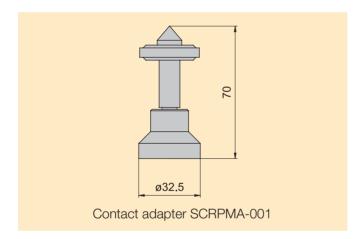

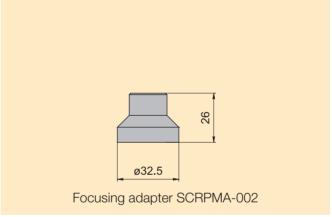

### Supply range and accessories

SCRPM tachometer	Order code
2010,000 RPM	SCRPM-220
SCRPM accessories	Order code
Contact adapter	SCRPMA-001
Focusing adapter	SCRPMA-002
Reflector strips (spares)	SCRPMA-010
SCRPM tachometer with calibration certificate as per ISO 9001	Order code
2010,000 RPM	K-SCRPM-220

